

# USB-IF COMPLIANCE PROGRAM

---

## USB 2.0 Test Report for Full Speed Device

TM

Company Name: Holtek Semiconductor

Model Name: HT82A834R

Product Type: Audio Class

Product Receive Date: 2007/11/22

Test Start Date: 2007/11/22

Report Date: 2007/11/27

Test Result: **PASS**

Notice: Test result is valid only to the original tested device model. Allion reserves the right to prohibit others to distort, isolate, falsify, copied and/or by any process to change the content of this test report unless it is prior approved by Allion.

Project ID : UNC-HOK-USB-013\_1



© Allion Test Labs, Inc. All rights reserved.  
9F, No. 3-1, Yuan Ku Street, Taipei, Taiwan, 11543, R.O.C.  
Phone: +886-2-77228800 Fax: +886-2-26557879

# USB-IF COMPLIANCE PROGRAM

## Company

Company Name: Holtek Semiconductor  
Company Address: No.3, Creation Rd II, Science Park, Hsinchu 300, Taiwan, R.O.C.  
VID (Dec) 1241 The VID for the company who apply the USB-IF logo.

## Technical Contact

Name: Lee Chien Chia (李乾嘉)  
Phone Number: 03-5631999 ex. 1218  
E-Mail: eric\_lee@holtek.com.tw  
FAX Number: 03-5641557

## Marketing Contact

Name: \_\_\_\_\_  
Phone Number: \_\_\_\_\_  
E-Mail: \_\_\_\_\_  
FAX Number: \_\_\_\_\_

## Product Information:

Silicon Model Name: \_\_\_\_\_ TID (If you know): \_\_\_\_\_

\*\*\* These are requirement fields. All testing will be held until information is completed. \*\*\*

- Retail Device       Device and Silicon       Silicon Only  
 Hi Power       Low Power  
 Bus Powered       Self Powered  
 Untethered B       Tethered

Highest capacity tested for Mass Storage Device: \_\_\_\_\_

Device Category: \_\_\_\_\_ Device Description: \_\_\_\_\_

VID: 0x04D9      PID: 0x2834

Tested OS:  Win 2000  Win XP (Standard test fee will cover 1 OS only.)

Tester: Sam Chen

Authorized Signature: *Eric Chen*

Project ID : UNC-HOK-USB-013\_1

# USB-IF COMPLIANCE PROGRAM

## Legacy USB Compliance Tests

**Frameworks Test Result:**  Pass  Fail

Chapter 9:  Pass  Fail

HID View:  Pass  Fail  N/A

MSC Test:  Pass  Fail  N/A

UVC Test:  Pass  Fail  N/A

Interface: 4 MAX Power: 500 mA Remote Wakeup: Yes

**Power Current Test Result:**  Pass  Fail

Operating Power: 33.6 mA Unconfiguration Power: 24.4 mA (<100mA)  
(=< Max Power <= 100mA for Low Power) (=<Max Power <= 100mA)

(=< Max Power <= 100mA for Self Power)  
(=< Max Power <= 500mA for High Power)  
Configuration Power: 27.3 mA

(=< Max Power <= 100mA for Low Power)  
(=< Max Power <= 500mA for High Power)

Suspend Mode Power with Remote Wakeup: 516 uA

Suspend Mode Power without Remote Wakeup: 516 uA

(=< 2500uA for High Power /w Remote Wake Up)  
(=< 500uA for others)

**Interoperability Test Overall Result:**  Pass  Fail OS:  W2k  XP

### EHCI Controller:

- |   |  |                               |
|---|--|-------------------------------|
| 1. Enumeration and Driver installation:   | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 2. Check operation of device              | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 3. Interoperability – Operate all device: | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 4. Hot plug test                          | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 5. Warm Boot test                         | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 6. Remote Wake-up test                    | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 7. S3 Active Standby Test                 | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 8. S3 Active Standby Resume Test          | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 9. Topology change                        | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 10. S4 Active Hibernate Test              | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| 11. S4 Active Hibernate Resume Test       | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |

Project ID : UNC-HOK-USB-013\_1

# USB-IF COMPLIANCE PROGRAM

---

## UHCI Controller:

12. Interoperability – Operate all device:  Pass  Fail

## OHCI Controller:

13. Interoperability – Operate all device:  Pass  Fail

**Signal Quality Test Result:**  Pass  Fail

Full Speed UP Stream Signal Quality:  Pass  Fail

Inrush Current Test:  Pass  Fail

**Back Voltage Test Result:** (Enumerate before/after)  Pass  Fail

D+: 0 mV / 0 mV

D- : 0 mV / 0 mV

V<sub>Bus</sub>: 0 mV / 0 mV

(All values <= 400mV)

TM

# USB-IF COMPLIANCE PROGRAM

## More Detail Test Result:

### 1. Power Current: Pass with Waiver

The suspend mode power should not exceed 500uA.

\*\*\*Specification: All devices must draw 500uA or less current while in suspend unless the device is High-powered and has remote wakeup enabled where 2500uA is permitted.

\*\*\*

\*\*\*Waiver ID 17: The USB-IF allows any device to consume up to 2500uA while suspend.

\*\*\*

### 2. Full Speed Upstream Signal Quality: Pass

- Overall result: pass!
- Signal eye:  
eye passes
- EOP width: 167.23ns  
EOP width passes
- Receivers: reliable operation on tier 6  
receivers pass
- Measured signaling rate: 11.9932MHz  
signal rate passes
- Crossover voltage range: 1.59V to 1.71V, mean crossover 1.66V  
(first crossover at 1.70V, 10 other differential crossovers checked)  
crossover voltages pass
- Consecutive jitter range: -355.430ps to 102.526ps, RMS jitter 121.448ps  
Paired JK jitter range: -78.110ps to 95.707ps, RMS jitter 62.016ps  
Paired KJ jitter range: -37.673ps to 341.987ps, RMS jitter 176.085ps  
jitter passes



### Additional Information

- Rising Edge Rate: 258.09 V/us (minimum 10229.00, maximum 32.00V/us)
- Rising Edge Rate: 660.00 V/us (minimum
- Falling Edge Rate: 251.79 V/us (minimum 10484.85, maximum 32.00V/us)
- Falling Edge Rate: 660.00 V/us (minimum
- Edge Rate Match: 2.50% (limit +/-10%)

### Signal Data and Eye

Project ID : UNC-HOK-USB-013\_1

# USB-IF COMPLIANCE PROGRAM

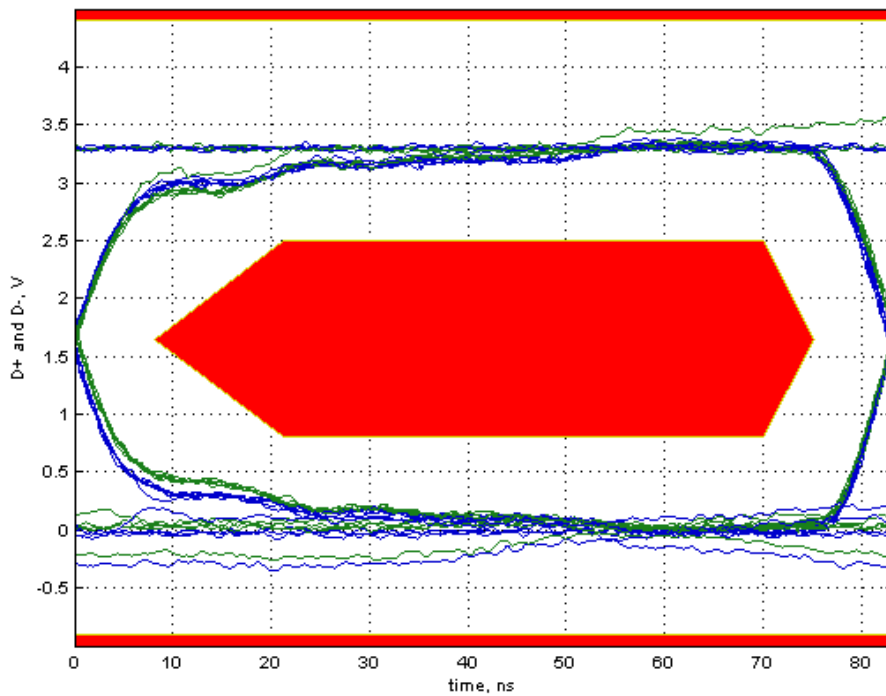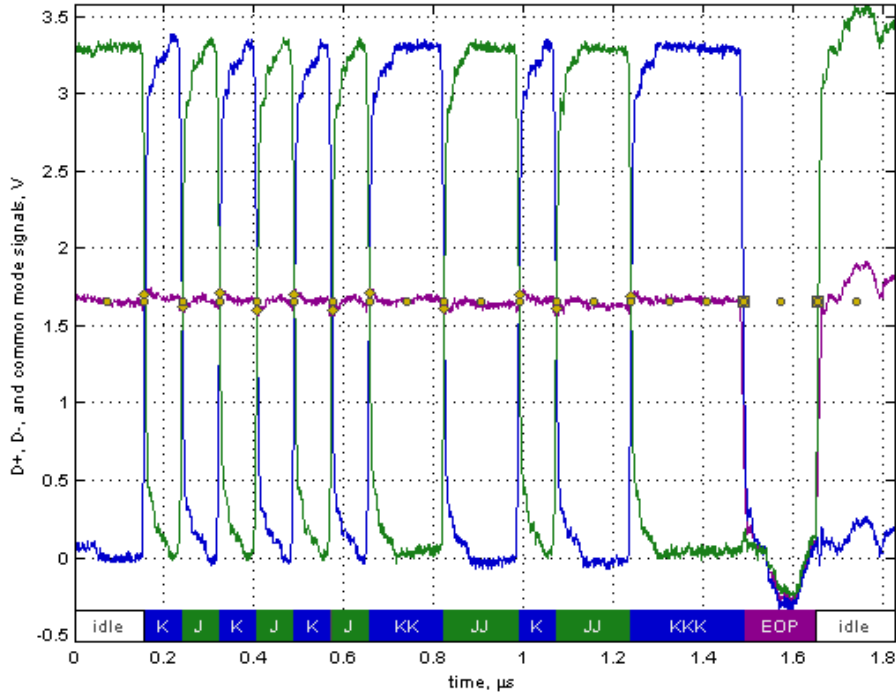

Project ID : UNC-HOK-USB-013\_1



© Allion Test Labs, Inc. All rights reserved.  
 9F, No. 3-1, Yuan Ku Street, Taipei, Taiwan, 11543, R.O.C.  
 Phone: +886-2-77228800 Fax: +886-2-26557879


# USB-IF COMPLIANCE PROGRAM

## 3. Inrush Current: Pass

- Overall result: pass!
- Inrush at 5.150V: 19.82 $\mu$ C  
inrush passes

### Hot Plug (Attach) Current Draw

TM

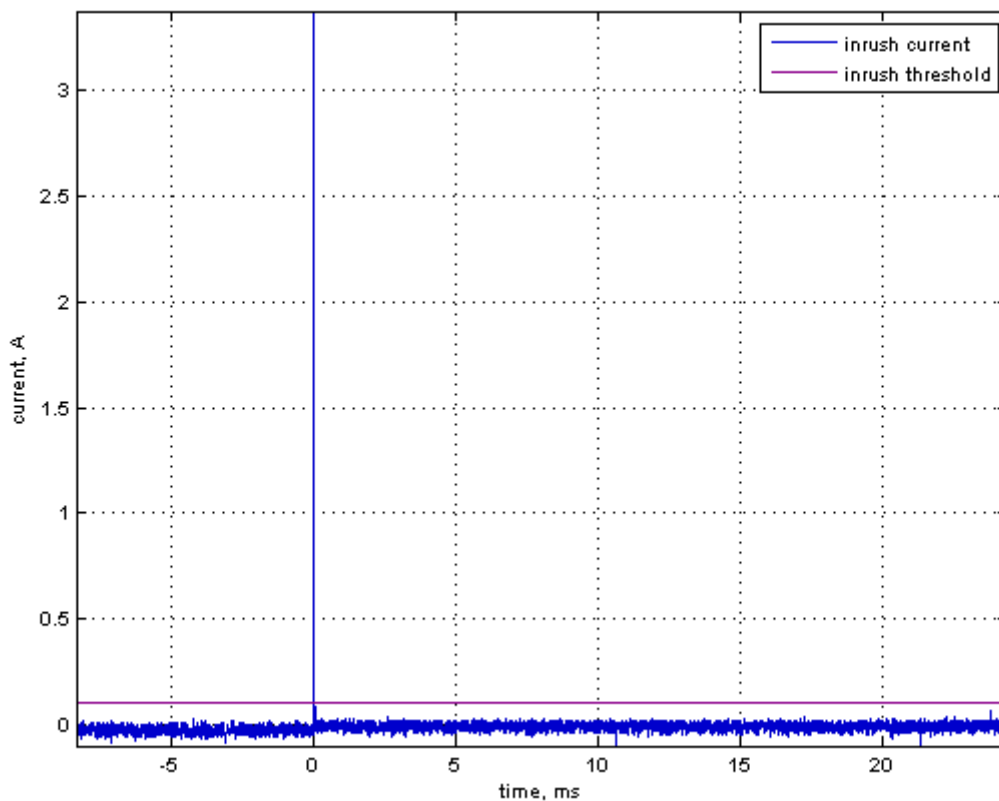

#### Test Procedure Reference:

1. Universal Serial Bus Implementers Forum Full and Low Speed Electrical and Interoperability Compliance Test Procedure, version: 1.3

Project ID : UNC-HOK-USB-013\_1