



# Rolling Code RF Receiver

## HT68F30

Flash Type MCU  
with EEPROM

### Characteristics

- Integrated EEPROM -- allows storage of relevant application data such as calibration data, manufacturing parameters, etc.
- Fully integrated RC system oscillator -- reduced external components such as resistor, crystal, etc.
- Supports up to 6 remote controllers
- 4 LEDs indicate 4-key remote controller status
- Supports ICP

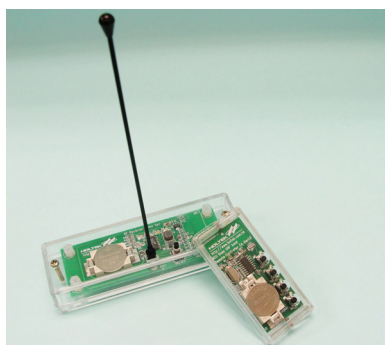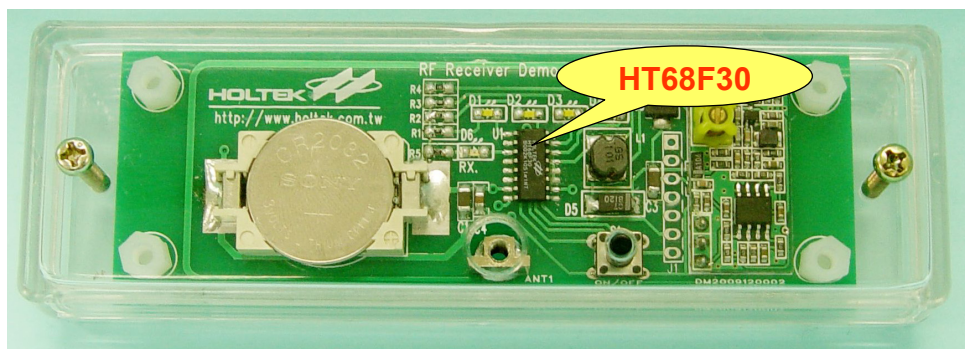

## Application Areas



Motorcycle, Car, Wireless RF Receiver Applications

## Application Circuit

